


Bailey & Mackey Ltd

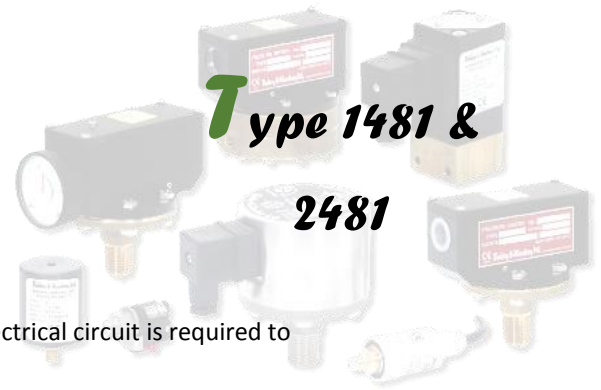

Type 1481 &
2481

This series of pressure switches can be used for all applications where an electrical circuit is required to close or open at a required pressure.

The robustness of this series of pressure switches enables all applications in all industries to be satisfied.

- Robust & Reliable
- Diaphragm Operated
- Proven Performance
- Enclosure Rating IP65
- Twin Circuit Option
- CE Marked
- Fully Adjustable
- Wetted Parts for use with all fluids
- Easily Customised



Mechanical Specifications

Pressures

Pressure Ranges	Hysteresis Typical
5 to 125 mbar	2.5 mbar
15 to 250 mbar	4 mbar
25 to 400 mbar	10 mbar

Electrical Ratings

10 Amp at 250V ac 50Hz Inductive Load
1 Amp at 30V dc Inductive Load

For other voltages and currents please consult our Technical Sales Department.


Standard Materials

Diaphragm	Beryllium Copper
Seal	Glass filled PTFE
Housing	Aluminium/Zinc Diecast
Cover	Glass filled nylon with Neoprene seal
Base	Brass

Set Point Accuracy	+/- 2%
Temperature Range	-10 to +85°C (Process fluid must not solidify)
Temperature Coefficient	0.05% (of range per 0°C from 20°C)

2481

- Two Independently operating micro-switches
- External dimensions are the same as the standard Switches
- Reset Differentials are approximately twice those given for the standard switches
- Electrical rating 5 Amp at 250V AC 50hz

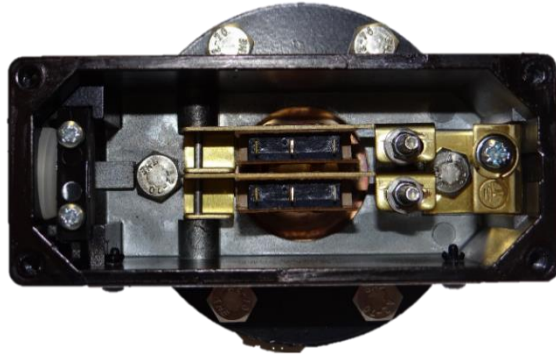

Further Info

Maximum Pressure

To ensure long service and life select the pressure range as follows:

Dynamic pressure applications $P_{max} = 75\%$ of Range

Static pressure applications $P_{max} = 100\%$ of Range

Maximum Pressure that can be applied is 125% of pressure range

Installation

The Switches can be mounted directly on the connecting thread. Sealing grooves are machined into the end face of the parallel threads for the use with sealing washers. A mounting bracket is available if required.

Vacuum Setting

At ambient pressure the switches will be in the operated condition consequently the wiring should be reversed i.e NO becomes NC.

Connecting Threads

All Connecting threads used in industry are available including British, American and Metric. Please state the connection required thread when ordering.

Flanged fittings are available and all types of Hygienic fittings can be supplied assembled directly onto the Pressure Switch. If flush diaphragms are required please consult our Technical Sales Department.

Alternative Wetted Parts also available, please contact our Technical Sales Department for options and information on this.

Switches

Technical Drawings

