




ELECTRICAL CONNECTIONS

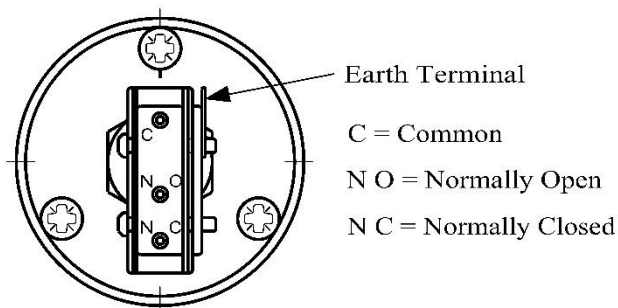

Setting

1. To remove top cover – remove screws, hold switch hexagon firmly and snap cover off.
2. Turn micro-switch and bracket clockwise using spanner on hexagon to lower operating pressure and anti-clockwise to increase.

NOTE: a change in setting of 10% of the range can be obtained by rotation in approximately 30°. Accuracy of setting will be within $\pm 3\%$ of max pressure.

Crimp tags not included. Solder to terminals, if required please order tags Part no K10SM.

To comply with electrical wiring regulation. Cover must be in place before current is switched on unless switch is installed in a secure enclosure.